



REV	DOCUMENT	CHANGED BY	CHECKED BY








P.C.B mounting detail
top view

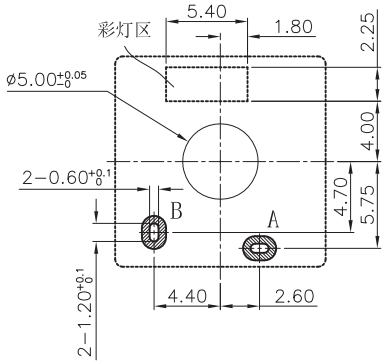

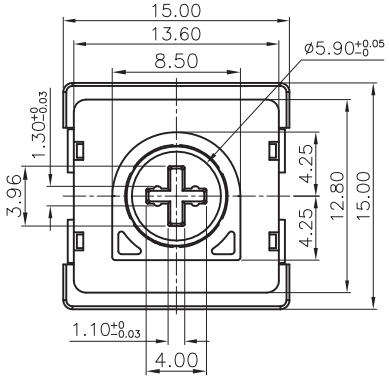


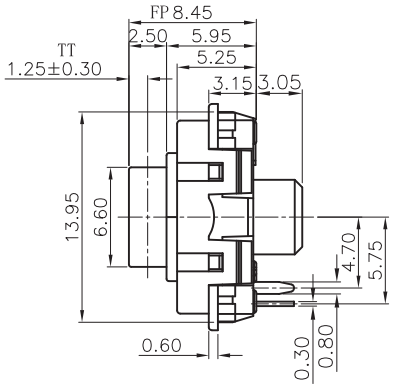





CIRCUIT



1. 功能参数表：

Operating Force	45±10gf
Paragraph Feel	N
Voice	N
Pre Travel	1.25±0.30mm
Total Travel	2.50±0.20mm
Mechanical Life	50,000,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
6	SPRING	SUS	1	HEAT TREATMENT
5	TERMINAL	COPPER ALLOY+Au	1	NATURAL
4	CONTACT PIECE	COPPER ALLOY+Au	1	NATURAL
3	BASE	PA	1	BLUE
2	COVER	PC	1	TRANSPARENT
1	KNOB	POM	1	WHITE

一般公差 GENERAL TOLERANCE		单 位 UNIT	mm	DOOZEN	
.X±0.5	ANGLES	材 质 MATERIAL	/		
.XX±0.02	X.° ±2°	体 积 VOLUME	/	名 称 TITLE	线性矮轴
.XXX±0.05	.X ±0.5°	重 量 WEIGHT	/	料 号 PART NO.	A0301-LXXXX-XXXXXX-N01
设 计 DESIGNED		表面积 SURFACE	/	图 号 DRAWING NO.	A0301-LXXXX-XXXXXX-N01 版本 REV. A0
审 核 CHECKED		图 类 TYPE	零件图	角 法 PROJ.	图 幅 SIZE A3 比 例 SCALE 4:1 张 数 SHEET 1/1
核 准 APPROVED					